

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ChiliTec GmbH

Supplier's address: Technik, Bäckerberg 12, 38165 Lehre, DE

Model identifier: 22160

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Wire		
Mains or non-mains:	MLS	Connected light source (CLS):	Nein
Colour-tuneable light source:	Nein	Envelope:	-
High luminance light source:	Nein		
Anti-glare shield:	Nein	Dimmable:	No


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 500
On-mode power (P_{on}), expressed in W	20,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	87
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,300 0,300	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	34	Survival factor	0,50	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	2	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,8	Stroboscopic effect metric (SVM)	0,5	

(a) : not applicable;

(b) : not applicable;

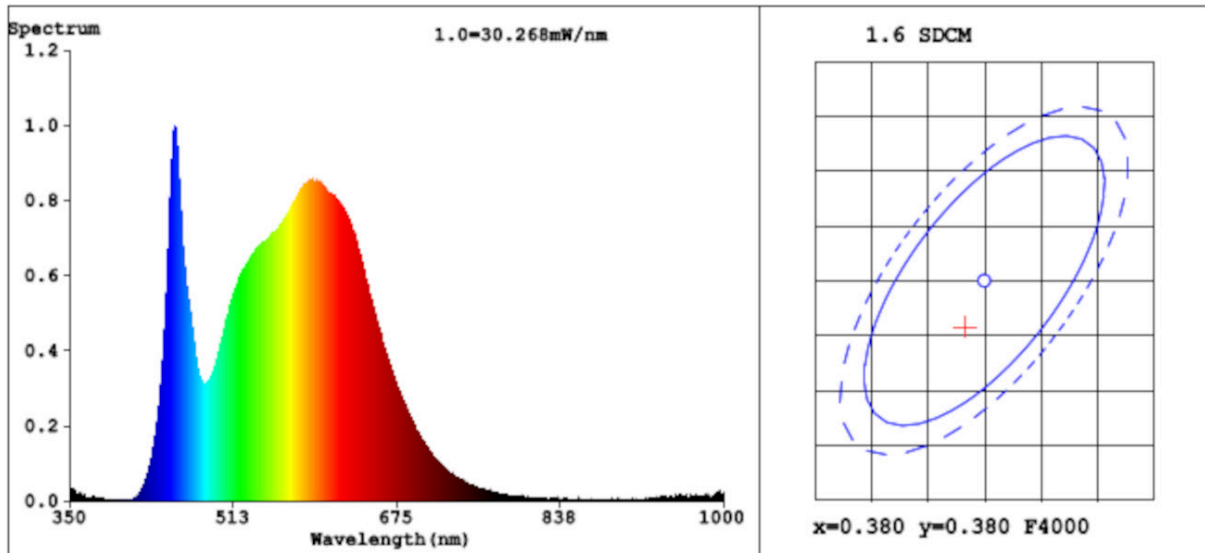

Color Parameters:

Chromaticity Coordinate: $x=0.3783$ $y=0.3758$ $u'=0.2241$ $v'=0.5008$

CCT=4053K(Duv=0.0002) Dominant WL:Ld =578.8nm Purity=26.3%

Ratio:R=18.7% G=77.3% B=4.0% Peak WL:Lp=453.8nm FWHM=25.4nm

Render Index:Ra=87.4 AvgR=82.2

R1 =87 R2 =93 R3 =96 R4 =85 R5 =86 R6 =89 R7 =89

R8 =74 R9 =34 R10=82 R11=85 R12=64 R13=89 R14=98 R15=82